

GV-Housing104 Housing Box



Introduction

GV-Housing104 is a housing box designed to support the outdoor Box Camera installation with external protection. It conforms to IP68 and IK10 standards, and includes a heater and a fan. GV-Housing104 also supports GV-Mount accessories, allowing the Box Camera to be installed on poles, convex and concave surfaces. Adopting the housing box enables flexible installation of the Box Camera to meet your needs for IP surveillance in a variety of environmental conditions.

Applied to

- GV-BX2802
- GV-BX4802

Specifications

Power		2-pin terminal block (DC 12V 1.5A / AC 24V 1.2A)
Temperature	Operation	-40°C ~ 50°C (-40°F ~ 122°F)
Heater	On	15°C (59°F)
	Off	25°C (77°F)
Fan	On	35°C (95°F)
	Off	25°C (77°F)
Dimensions (L x W x H)		405 x 150 x 130 mm (15.9 x 5.9 x 5.1’')
Weight		3.08 kg (6.79 lb) (including Supporting Tube)
Ingress Protection		IP68
Vandal Resistance		IK10 (for metal casing)

Note: Specifications are subject to change without notice.


Accessories

Model No	Name	Details	
GV-Mount300-1	Convex Corner Adapter Kit		Dimensions: 238.6 x 395.2 x 210 mm (9.4" x 15.5" x 8.2") Weight: 4.27 kg (9.41 lb)
GV-Mount310-1	Concave Corner Adapter Kit		Dimensions: 111.2 x 369.9 x 210 mm (4.37" x 14.5" x 8.2") Weight: 2.96 kg (6.53 lb)
GV-Mount400-1	Pole Mount Bracket Kit (Ø 4 ~ 6")		Dimensions: Bracket: 68.4 x 240 x 163 mm (2.69" x 9.44" x 6.41") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: Ø 4" ~ 6"
GV-Mount410-1	Pole Mount Bracket Kit (Ø 6 ~ 7.5")		Dimensions: Bracket: 68.4 x 240 x 163 mm (2.69" x 9.44" x 6.41") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: Ø 6" ~ 7.5"
GV-LIR3218-070	Infrared Illuminator		Dimensions: 157 x 105 x 80.7 mm (6.18 x 4.13 x 3.17") Weight: 0.85 kg (1.87 lb) IR Distance: 60 m (200 ft)


Packing List

- Housing Box
- Supporting Tube
- Screw Anchor x 3
- Screw (1/4" x 32 mm) x 3
- Plain Washer x 3
- Hex Key
- Silica Gel Bag
- Sticker (for Silica Gel Bag)
- Screw (1/4" x 12.5 mm)
- Plain Washer
- Plastic Washer
- Plastic Black Plate

Dimensions

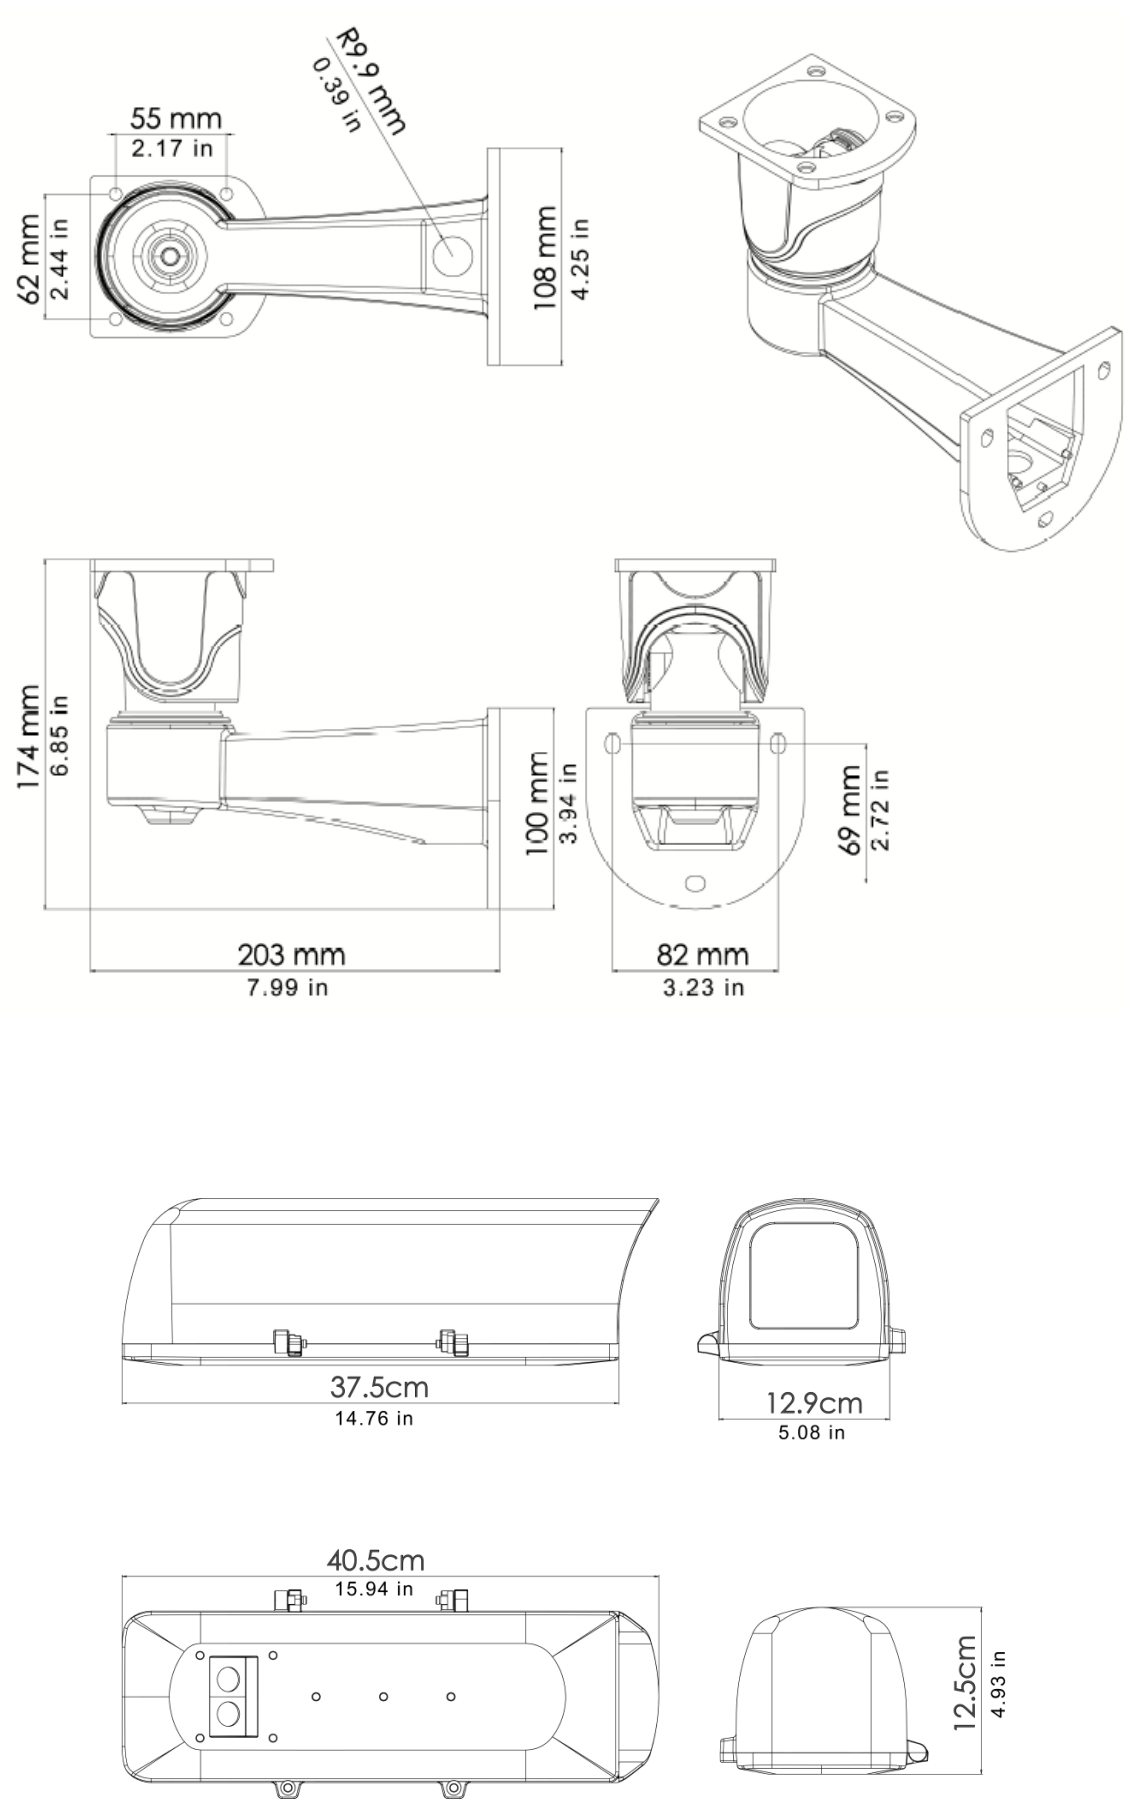

Installation

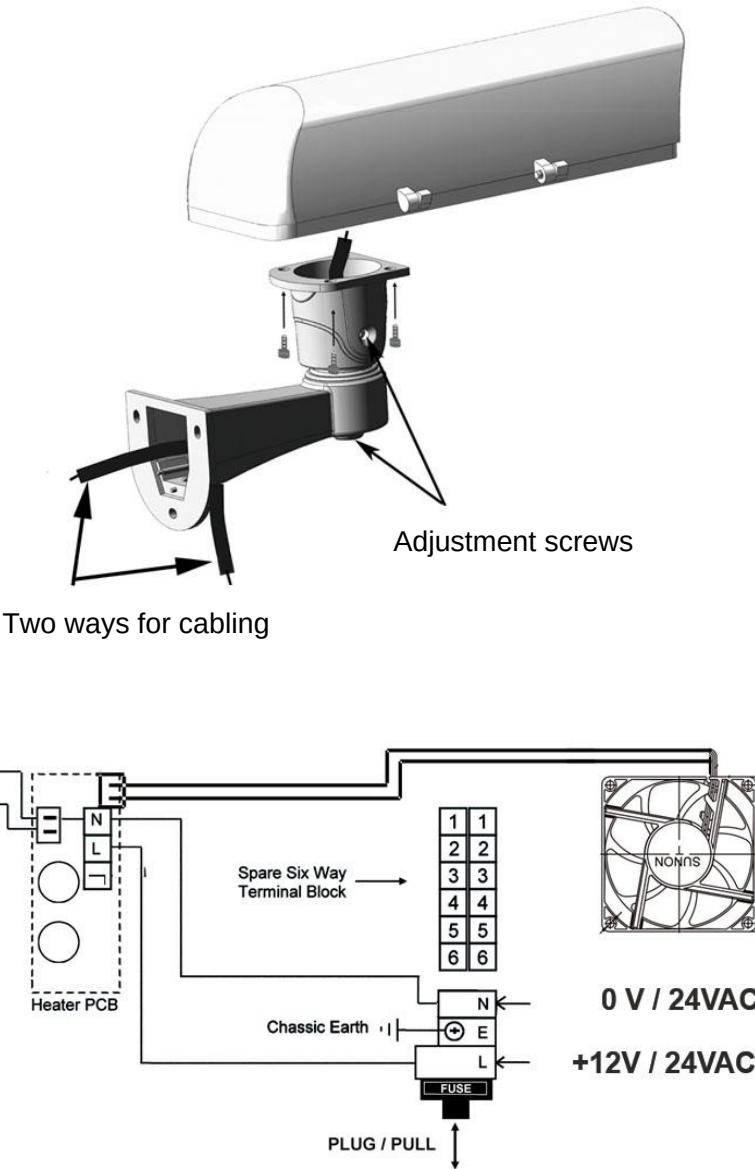

- Note:**
- 1. To pass through the housing box, an Ethernet cable without an RJ-45 connector is required.
 - 2. Apply the supplied sticker to the housing box cover to adhere the silica gel bag while avoiding blocking the fan.
 - 3. Make sure you conceal the silica gel bag in the housing box **within two minutes** of exposing to the open air.