



GV-POS S/W Capture

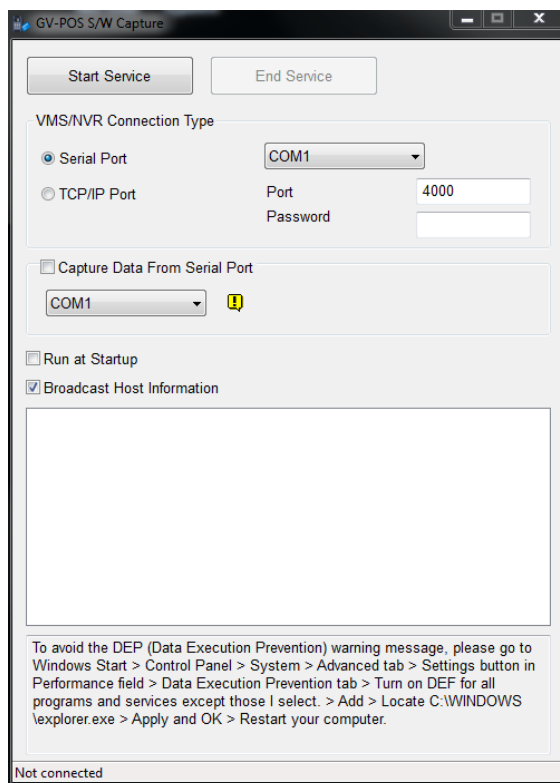

INTRODUCTION

Using GV-POS S/W Capture, you can directly connect a Windows-based POS device, generating EMF files or any other raw (unprocessed) data, to GV-DVR / NVR / VMS. The transaction data of the POS device can be transferred to the GV-DVR / NVR / VMS via a RS-232 serial cable or TCP/IP connection to be overlaid onto camera live view and recordings.

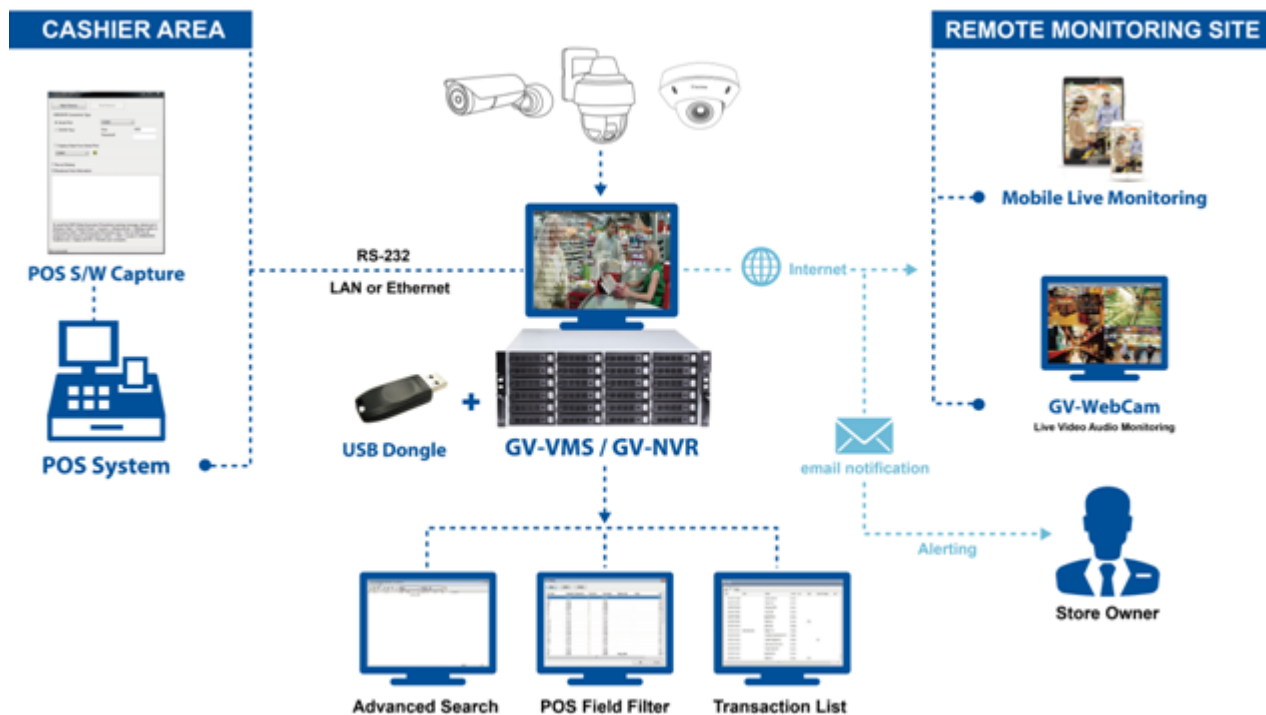

Specifications		
Supported POS Device Type		Windows based (generating EMF files or any other raw data)
Software		GV-POS S/W Capture
Hardware		GV-USB Dongle with 1, 2, 4, 8, 12, 16 or 32 port(s)
Supported Software		GV-DVR / NVR / VMS
Max. number of POS connected to GV-System	Serial Port Connection	4
	Network connection	16 for GV-DVR / NVR 32 for GV-VMS
Note: - It is required to install the program GV-POS S/W Capture on the POS device. The program can be found from our website. - All specifications are subject to change without notice.		