

GV-QFER12700 12MP H.265 Low Lux WDR IR Fisheye IP Camera



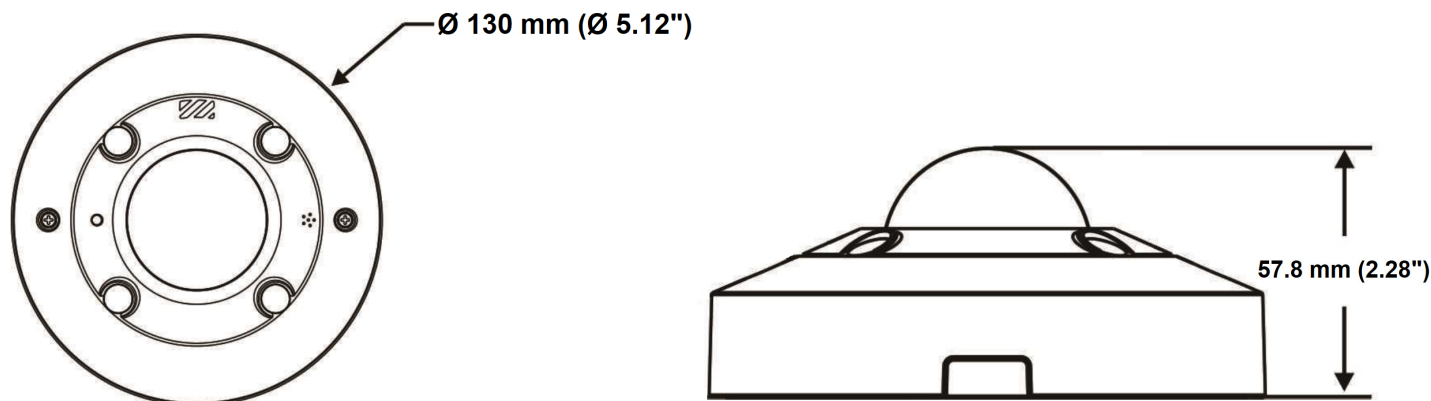
Introduction

GV-QFER12700 is a 12 MP outdoor fisheye camera allowing you to monitor all angles of a location and can be installed to the ceiling or the wall. GV-QFER12700 supports H.265 video codec to achieve better compression ratio while maintaining high video quality at reduced network bandwidths. The live view of the camera can be accessed from up to 20 connections through the web interface. Equipped with automatic IR-cut filter and IR LEDs, GV-QFER12700 is capable of day and night surveillance. Furthermore, the camera has the capability to conduct on-edge fisheye dewarping, eliminating the need to utilize recourses from the backend devices.

Key Features

- 1/1.7" progressive scan CMOS
- Quad streams from H.265, H.264 or MJPEG
- Up to 20 fps at 4000 x 3000
- On-edge dewarping up to 8 MP; software dewarping up to 12 MP
- Day and Night function (with removable IR-cut filter)
- Vandal resistance (IK10 for metal casing)
- Ingress protection (IP66)
- One sensor input and one alarm output
- Built-in micro SD card slot (SD/SDHC/SDXC/UHS-I, Class 10) for local storage
- Two-way audio capable
- DC 12V/ PoE (IEEE 802.af)
- Provides 360° and 180° panorama view
- Different angle of view accessible by multiple users at the same time
- Playback from any view angle and zoom level
- No mechanical moving parts
- Low lux enhancement
- 3D noise reduction
- Virtual PTZ function
- 12 languages on Web interface
- ONVIF Profile S / G/ T support

Dimensions



Specifications

Camera		
Image Sensor		1/1.7" progressive scan CMOS
Picture Elements		4000 (H) x 3000 (V)
Minimum Illumination	Color	0.1 Lux
	B/W	0.01 Lux
	IR On	0 Lux
Shutter Speed		(1 ~ 1/10000 sec)
White Balance		Auto / Manual
S/N Ratio		52dB
WDR		Yes
Dynamic Range		77dB
Optics Lens		
Megapixel		Yes
Day/Night		Yes (with removable IR-cut filter)
Lens Type		Fixed
Focal Length		1.65 mm
Maximum Aperture		F/2.8
Image Format		1/1.7"
Horizontal FOV		180°
Operation	Focus	Fixed
	Zoom	Fixed
	Iris	Fixed
IR LED Quantity		4 IR LEDs
Max. IR Distance		10 m (35 ft)
Operation		
Video Compression		H.265, H.264, MJPEG
Video Streaming		Quad streams from H.265, H.264 or MJPEG
Frame Rate		20 fps at 4000 x 3000 (50/60 Hz) *The frame rate and the performance may vary depending on the number of connections and data bitrates (different scenes).
Image Setting		Brightness, Contrast, Saturation, Sharpness, Hue, White Balance, Shutter Speed, D/N Sensitivity, Backlight Compensation, WDR, Denoise
Hardware (On-Edge)	Ceiling Mount	Fisheye View, Single View, Dual 180 Degree, Quad View
	Wall Mount	Fisheye View, Single View, 180 Degree, 360 Degree
Dewarping		
Audio Compression		G.711
Audio Support		Two-way Audio (external microphone and speaker required)
Sensor Input		1 input
Sensor Output		1 output

Video Resolution			
Software Dewarping	Main Stream		4000 x 3000 (Default), 1920 x 1080
	Sub Stream		1024 x 768 (Default), 800 x 600, 640 x 480, 320 x 240
	Third Stream (Closed by Default)		800 x 600, 720 x 576, 640 x 480, 352 x 288, 320 x 240
	Quad Stream (Closed by Default)		800 x 600, 720 x 576, 640 x 480, 352 x 288, 320 x 240
Hardware (On-Edge) Dewarping	Main Stream	Fisheye	2976 x 2976, 2048 x 2048, 2048 x 1536, 1920 x 1080
		Single View	2976 x 2976, 2048 x 2048, 2048 x 1536, 1920 x 1080
		Dual 180 Degree	2048 x 1536, 1920 x 1080
		Quad View	2976 x 2976, 2048 x 2048, 2048 x 1536, 1920 x 1080
	Sub Stream	Fisheye	2048 x 2048, 2048 x 1536, 1920 x 1080, 1600 x 1200, 1408 x 1408, 960 x 960, 960 x 720, 960 x 544
		Single View	2048 x 2048, 2048 x 1536, 1920 x 1080, 1600 x 1200, 1408 x 1408, 960 x 960, 960 x 720, 960 x 544
		Dual 180 Degree	2048 x 1536, 1920 x 1080, 1600 x 1200, 960 x 720, 960 x 544
		Quad View	2048 x 2048, 2048 x 1536, 1920 x 1080, 1600 x 1200, 1408 x 1408, 960 x 960, 960 x 720, 960 x 544
	Third Stream (Closed by Default)	Single View	480 x 360
Network			
Interface		10/100/1000 Ethernet	
Protocol		ARP, IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, ONVIF (Profile S/G/T)	
Security Feature		- No default ID and Password - 802.1x authentication - HTTPS with a SSL certificate stored in the camera	
Mechanical			
Connectors	Power		DC Jack
	Ethernet		RJ-45
	Audio		1 In (external microphone) 1 Out (Stereo phone jack, 3.5 mm / 0.14")
	Digital I/O		4-pin terminal block pitch 2.5 mm (0.1")
	Local Storage		Micro SD card slot (SD/SDHC/SDXC/UHS-I, Class 10) Support recording to NAS
General			
Operating Temperature	Start-up	-20°C ~ 70°C (-4°F ~ 158°F)	
	Operation	-30°C ~ 55°C (-22°F ~ 131°F)	
Humidity		10% to 90% (no condensation)	
Power Source		12V DC / PoE (IEEE 802.3af)	
Max. Power Consumption		12.95W	
Dimension		Ø 130 x 57.8 mm (Ø 5.12" x 2.28")	
Weight		565 g (1.25 lb)	
Ingress Protection		IP66	
Vandal Resistance		IK10	
Regulatory		CE, FCC, RoHS compliant	
Power over Ethernet			
PoE Standard		PoE (IEEE 802.3af Power over Ethernet / PD)	
PoE Power Supply Type		End-Span, Mid-Span	
PoE Power Output		Per Port 48 V DC, 320 mA, Max. 15.4 W	
Web Interface			
Installation Management		Web-based configuration	
Maintenance		Firmware upgrade through Web Browser or GV-IP Device Utility	
Language		Czech, English, French, German, Hungarian, Italian, Japanese, Portuguese, Russian, Spanish, Traditional Chinese, Simplified Chinese	

Applications	
Software Supported	GV-VMS (V17.4.1 / V18.2.1) *It is required to apply patch files to all the supported software. *Currently only GV-VMS, applied with the patches, supports GV-QFER12700.
Smart Device Access	GV-Eye for iOS and Android
Live Viewing	Internet Explorer, Non-IE browser (Edge, Chrome, Firefox, Safari), Mobile App *Edge, Chrome, and Firefox only support displaying live view with MJPEG and H.264. *Safari only supports displaying live view with MJPEG.

Note:



- Do not use clothes or any ordinary material to clean the camera cover since they may result in scratches.
- Mind the following when using an inserted memory card for recording:
 - Recorded data on the memory card can be damaged or lost if the data are accessed while the camera is under physical shock, power interruption, memory card detachment or when the memory card reaches the end of its lifespan. No guarantee is provided for such causes.
 - The stored data can be lost if the memory card is not accessed for a long period of time. Back up your data periodically if you seldom access the memory card.
 - Memory cards are expendable and their durability varies according to the conditions of the installed site and how they are used. Back up your data regularly and replace the memory card annually.
 - To avoid power outage, it is highly suggested to apply a battery backup (UPS).
 - For better performance, it is highly suggested to use micro SD card of MLC NAND flash, Class 10.
 - Replace the memory card when its read/write speed is lower than 6 MB/s or when the memory card is frequently undetected by the camera.
- To avoid reflected glare by IR LED, keep a minimum distance of 1 M (3.28 ft) between the camera body and nearby walls.
- Specifications are subject to change without notice.


Packing List

- GV-QFER12700
- Self-Tapping Screw x 3
- Plastic Anchor x 3
- Torx Wrench
- Waterproof Rubber Set
- 4-Pin Terminal Block
- Download Guide
- Warranty Card

Accessories

Model No.	Name		Details
GV-Mount100	Straight Tube and Junction Box Kit		Dimensions: 200 x 170 x 257.5 mm (7.9" x 6.7" x 10.1") Weight: 3.17 kg (6.99 lb)
GV-Mount101	Straight Tube Kit		Dimensions: 219 x 125 x 332 mm (8.6" x 4.9" x 13.1") Weight: 1.8 kg (3.97 lb)

GV-Mount200	Wall Pendant Mount		Dimensions: 225 x 140 x 250 mm (8.9" x 5.5" x 9.8") Weight: 900 g (1.98 lb) Note: To ensure the image quality, leave a distance of 1 M or more between the camera body and the wall.
GV-Mount203	Wall Mount and Junction Box		Dimensions: 315 x 195.5 x 225 mm (12.4 x 7.7 x 8.9") Weight: 2.95 kg (6.5 lb)
GV-Mount206-1	Wall Box Mount		Dimensions: 126.5 x 211.3 x 176.85 mm / 5 x 8.3 x 6.96" Weight: 1.06 kg (2.33 lb)
GV-Mount208-2	Swan Neck Mount		Dimensions: 1043 x 519 x 256 mm (41.06" x 20.43" x 10.08") Weight 10.5 kg (23.15 lb)
GV-Mount300-1 (must be used with GV-Mount200 / 203 and GV-Mount903-2)	Convex Corner Adapter Kit		Dimensions: 238.6 x 395.2 x 210 mm (9.4" x 15.5" x 8.2") Weight: 4.27 kg (9.41 lb)
GV-Mount310-1 (must be used with GV-Mount200 and GV-Mount903-2)	Concave Corner Adapter Kit		Dimensions: 111.2 x 369.9 x 210 mm (4.37" x 14.5" x 8.2") Weight: 2.96 kg (6.53 lb)
GV-Mount702	Extension Tube		Four options are available. Dimensions: Ø 5.4 x 10 or 20 or 30 or 50 cm (Ø 2.1" x 3.9" or 7.9" or 11.8" or 19.7") Weight: 180 g or 390 g or 550 g or 800 g (0.4 lb or 0.86 lb or 1.21 lb or 1.76 lb)
GV-Mount903-2	Dome Housing Mount		Dimensions: Ø 185.5 x 165.3 mm (Ø 7.3" x 6.5") Weight: 1.03 kg (2.27lb)
GV-Mount904-2	Tilting Wall Mount Bracket		Dimensions: Ø 159.1 x 40.5 mm (Ø 6.3 x 1.6") Weight: 0.48 kg (1.05 lb)
GV-Mount912-1	Power Box Mount Bracket		Dimensions: Ø 130 mm (Ø 5.1") Weight: 180 g (0.4 lb)

GV-Mount919	In-Ceiling Mount		Dimensions: Ø 189 x 75.9 mm (Ø 7.44 x 2.98") Weight: 525 g (1.15 lb)
GV-PA191	PoE Adapter		GV-PA191 is a Power over Ethernet (PoE) adapter designed to provide power to the IP device through a single Ethernet cable.
GV-PA301	Gigabit PoE Adapter		GV-PA301 is a Gigabit Power over Ethernet (PoE) adapter.
GV-PoE Switch	GV-PoE Switch is designed to provide power along with network connection for IP devices. GV-PoE Switch is available in various models with different numbers and types of ports.		
Power Adapter	Contact our sales representatives for the countries and areas supported.		

Note: Please note that using a pendant or corner mount with the Fisheye camera may cause an IR reflection due to its 360-degree IR.