

GV-LPR2812-DL AI 2MP H.265 10x Zoom Super Low Lux WDR Pro LPR IR

Bullet IP Camera



- Processore LPR integrato basato su deep learning per il riconoscimento delle targhe
- Riconoscimento a doppia corsia
- CMOS da 1/2.8" con scansione progressiva e sensibilità ultra elevata in condizioni di scarsa luminosità
- Illuminazione minima: 0,04 lux
- Terzo stream disponibile in H.265, H.264 e MJPEG
- Fino a 30 fps a 1920 x 1080
- Obiettivo varifocale motorizzato per la regolazione da remoto di zoom e messa a fuoco
- IR intelligenteIR
- Distanza IR fino a 22 m (70 ft)
- Funzione Giorno e Notte (con filtro IR removibile)
- Ampia Gamma Dinamica Pro (WDR Pro)
- Alimentazione DC 12V / PoE (IEEE 802.3af)
- Protezione contro l'ingresso di polvere e acqua (IP67)
- Resistenza agli atti vandalici (IK10 per il corpo in metallo)
- Supporto audio monodirezionale
- Slot per scheda microSD integrato (SD / SDHC / SDXC / UHS-I, Classe 10) per l'archiviazione locale
- I/O digitale (1 ingresso / 1 uscita)
- Riconosce veicoli con velocità fino a 100 km/h (62 mph)
- Database autonomo
- Esportazione dei log
- Risultati LPR sovrapposti alle immagini di riconoscimento
- Rilevamento di movimento
- Mascheramento della privacy
- Filtraggio degli indirizzi IP
- Conforme a CE, FCC, UKCA, LVD, RoHS

Introduzione

GV-LPR2812-DL è in grado di riconoscere i numeri di targa grazie al suo processore LPR integrato basato su deep learning. GV-LPR2812-DL può confrontare le targhe acquisite sia con il proprio database autonomo integrato (on-the-edge), sia con il database memorizzato nel sistema di controllo accessi GV-ASManager. In caso di corrispondenza, **GV-LPR2812-DL** può concedere l'accesso al veicolo aprendo un cancello o una barriera.

GV-LPR2812-DL è una telecamera di rete a colori da 2 MP con zoom ottico 10x, progettata per riconoscere targhe riflettenti e non riflettenti di veicoli in movimento fino a 100 km/h (62 mph). Grazie all'obiettivo motorizzato e all'illuminazione IR intelligente, lo zoom e la messa a fuoco della telecamera possono essere regolati da remoto. Inoltre, è in grado di adattare automaticamente la velocità dell'otturatore in base alla scena per catturare immagini nitide delle targhe anche in condizioni di scarsa illuminazione. La telecamera è conforme agli standard IP67 e IK10 e può funzionare a temperature comprese tra -20°C (-4°F) e 55°C (131°F). 131°F .



Specifiche

Camera		
Image Sensor		1/2.8" progressive scan super low lux CMOS
Minimum Illumination	Color	0.04 Lux (F1.6 AGC ON)
	B/W	0.02 Lux (F1.6 AGC ON)
Picture Elements		1920 (H) x 1080 (V)
Shutter Speed		Auto / Manual (1/30 ~ 1/32,000 sec.)
White Balance		Auto / Manual (2000 K ~ 10000 K)
S/N Ratio		45 dB
WDR		Yes
Dynamic Range		90 dB
Max. Speed		100 km/h (62 mph)
Lenti		
Megapixel		2 MP
Day/Night		Yes (with removable IR-cut filter)
Lens Type		Motorized Varifocal
Focal Length		5.1 ~ 51 mm
Horizontal FOV		55.2° (W) ~ 7.1°(T)
Maximum Aperture		F/1.6
Operation	Focus	Auto / Manual
	Zoom	10x Optical Zoom; 5x Digital Zoom
	Iris	Auto / Manual
IR LED Quantity		4 IR LEDs
IR Distance		22 m (70 ft)
Operation		
Video Compression		H.265, H.264, MJPEG
Video Stream		Triple streams from H.265, H.264 and MJPEG

Frame Rate		50Hz: 25 fps at 1920 x 1080, 26 ~ 50 fps at 1920 x 1080 WDR Off 60Hz: 30 fps at 1920 x 1080 (default), 31 ~ 60 fps at 1920 x 1080 WDR Off * The frame rate and the performance may vary depending on the number of connections and data bitrates (different scenes)
Maximum stream		5 connections
Image Setting		Brightness, Contrast, Saturation, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation (0°, 90°, 180°, 270°), Shutter Speed, Backlight Compensation, AE Sensitivity, Denoise, Metering, 3D Noise Reduction
Audio Compression		G.711U / G.711A
Audio Support		One-way audio (external microphone required)
Digital I/O	Input	1 Input (TTL, +3 – 5V DC)
	Output	1 Relay Output (40V DC, 300 mW / 300 mA)
Video Resolution		
Main Stream	4:3	1280 x 960, 1024 x 768, 800x 600, 640 x 480, 480 x 360
	5:4	1280 X 1024, 720 x 576
	16:9	1920 x 1080, 1280 x 720, 640 X 360
Sub Stream	4:3	1280 x 960, 1024 x 768, 800x 600, 640 x 480, 480 x 360
	5:4	1280 X 1024, 720 x 576
	16:9	1920 x 1080, 1280 x 720, 640 X 360
Third Stream (Closed by default)	4:3	1280 x 960, 1024 x 768, 800x 600, 640 x 480, 480 x 360
	5:4	1280 X 1024, 720 x 576
	16:9	1920 x 1080, 1280 x 720, 640 X 360
Network		
Interface		10/100 Mbps Base-T, RJ-45
Protocol		802.1x, DHCP, DNS, FTP, FTPS, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, Multicast, NTP, RTCP, RTP, RTSPS, RTSP, SNMP, SFTP, SSL, TLS, TCP/IP, UDP
Security Feature		- A new ID and password are required for the first-time login - 802.1x authentication - HTTPS with SSL certificate stored within the camera
Mechanical		
Connector	Power	DC Jack
	Ethernet	Ethernet (10/100Base-T), RJ-45 cable
	Audio	1 In (Audio in wire, Mono, 1.98 Vp-p, 2.2KΩ) * 1 Out (Audio out wire) not functional
	Digital I/O	I/O Wires (1 In / 1 Out)
	RS-485	RS-485+ / RS-485- (for recognition data output)
	Local Storage	microSD card slot (SD/SDHC/SDXC/UHS-I, Class 10), 64 GB * UHS-II card types are not supported.
LPR		
Min Height of License Plate Images		40 pixels
Region of License Plate		California (USA), Colombia, Czech, Germany, European Union, France, United Kingdom, Georgia (USA), Hungary, Israel, Italy, Lithuania, Malaysia, Netherlands, Romania, Slovakia, Taiwan, Ukraine, Vietnam, Brazil, Myanmar, Germany Border
Snapshot		Approximately 250000 snapshots may be stored based on the complexity of the detection environment.
Generali		
Operating Temperature	Startup	-20 °C ~ 55 °C (-4 °F ~ 131 °F)
	Operation	-20 °C ~ 55 °C (-4 °F ~ 131 °F)
Humidity		20% ~ 90% (non-condensing)
Power Source		DC 12V, 1.08A / PoE (48V, 0.27A, IEEE 802.3af)
Max. Power Consumption		13 W
Dimensions		Ø 86 mm x 191 mm (Ø 3.4" x 7.5")
Weight		0.55 kg (1.22 lb)
Ingress Protection		IP67

Vandal Resistance	IK10 for metal casing
Certification	CE, FCC, UKCA, RoHS compliant
Web Interface	
Installation & Management	Web-based configuration
Firmware Upgrade	Firmware upgrade through Web Browser or Utility
Access from Web Browser	Live View, Video Recording, Change Video Quality, Image Snapshot, Audio, Picture in Picture, Privacy Mask, Text Overlay, Digital PTZ
Language	English, Traditional Chinese
Applications	
Live Viewing	Browser (Chrome)
LPR Management	GV-ASManager V6.1.2 or later
Software Supported	GV-VMS (V17.4.8 / V18.3.5, patch files required)

Note: Specifications are subject to change without notice.

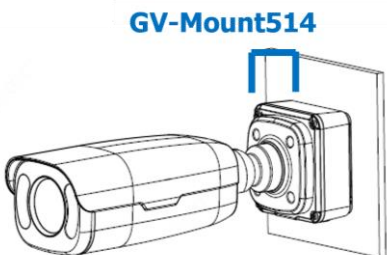
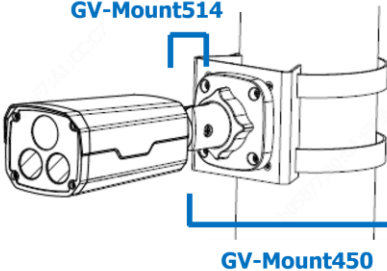
Accessori

Model No.	Name		Details
GV-Mount450 (must be used with GV-Mount514)	Pole Mount		Dimensions: 125 x 165 x 30 mm (4.92" x 6.50" x 1.18") Weight: 0.7 kg (1.54 lb) Steel strap Diameter: Ø 130 ~ 165 mm (Ø 5.12" ~ 6.5")
GV-Mount514	Junction Box		Dimensions: 132.3 x 132.3 x 51.5 mm (5.21" x 5.21" x 2.03") Weight: 0.4 kg (0.9 lb)
GV-PA191	PoE Adapter		GV-PA191 is a PoE adapter.
GV-PA301	Gigabit PoE Adapter		GV-PA301 is a Gigabit Power over Ethernet (PoE) adapter.
GV-POE Switch			GV-POE Switch is designed to provide power along with network connection for IP devices. GV-POE Switch is available in various models with different numbers and types of ports.
GV-Relay V2			GV-Relay V2 is designed to expand the voltage load of GV-IP devices. It provides 4 relay outputs, and each can be set as normally open (NO) or normally closed (NC) independently as desired.
Power Adapter			Contact our sales representatives for the countries and areas supported.

Packing List

- GV-LPR2812-DL Camera
- Drilling Sticker
- Screw Kit
- Waterproof Rubber Set
- 64 GB microSD Card (already formatted and inserted)
- Download Guide

Montaggio

Junction Box Mount	Junction Box Mount with Pole Mount
GV-Mount514	GV-Mount514 + GV-Mount450
	

Dimensioni

