

GV-GDR4900 Cloud AI 4MP H.265 Super Low Lux WDR Pro IR Mini Fixed Rugged IP Dome



- Direct-to-Cloud
- AI deep learning: AI Perimeter Protection & Classification (Human, Vehicle)
- 1/3" progressive scan CMOS
- Min. illumination at 0.005 lux
- Triple streams from H.265, H.264 and MJPEG
- Up to 30 fps at 2688 x 1520
- Intelligent IR
- IR distance up to 20 m (65 ft)
- Day and Night function (with removable IR-cut filter)
- Vandal resistance (IK10)
- Ingress protection (IP67)
- 3-axis mechanism (pan / tilt / rotate)
- DC 12V / PoE (IEEE 802.3af)
- Built-in microSD card slot (SD / SDHC / SDXC) for local storage
- Two-way audio capable
- Built in microphone
- Wide Dynamic Range Pro (WDR Pro)
- Defog
- 3D noise reduction, ROI video optimization reduction
- GV-Center V2 connection
- AI analytics (Line Crossing, Region Entrance, Region Exiting, Region Intrusion, Target Counting, Heat Map, Loitering Detection, Illegal Parking Detection, Face Detection, Video Metadata)
- Motion detection
- Text overlay
- Privacy mask 10 Layers
- 19 languages supported
- ONVIF (Profile G, S, T, M) conformant ISO/IEC27001:2022, ISO 9001:2015, ISO 14001:2015, CVE/CNA, Compliance NIS2, GDPR AI ACT E Cyber Resilience ACT
- Signed Firmware & Supply Chain Security:
- Installation and update are allowed exclusively for manufacturer-signed firmware. Firmware components are documented through a Software Bill of Materials (SBOM)

EU Certification



Certificazioni CyberSecurity e presso Lab.certificati Accredia


Introduction

GV-GDR4900 is an outdoor camera designed with IK10 vandal resistance and IP67 ingress protection. The camera supports H.265 video codec to achieve a better compression ratio while maintaining high-quality pictures at reduced network bandwidths. The camera adheres to IK10 and IP67 standards, and can be powered through PoE.


Empowered by deep learning algorithms, its AI technology distinguishes humans and vehicles from other moving objects. Integrated with GeoVision Video Management Software (VMS), it supports AI perimeter protection, real-time alert, event playback, and more. By connecting the camera to the cloud-based data center and video surveillance solution, GV-Cloud VMS, thousands of on-site videos, alarm devices, and AI events can be monitored and managed from a single platform.

Deep Learning Function


Face Detection

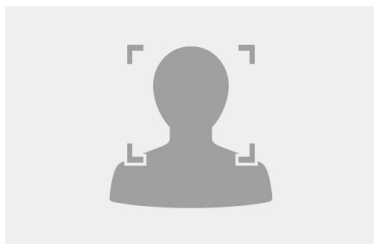


AI Perimeter Protection

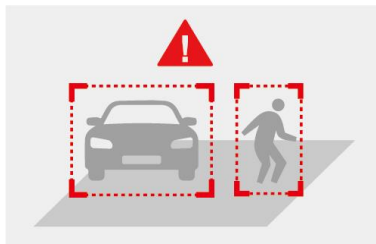

People Counting

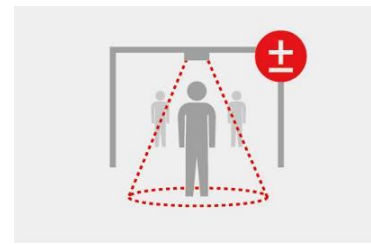

Dimensions

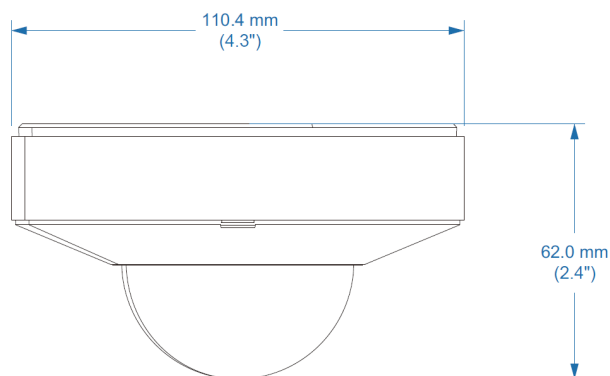

Specifications

Camera		
Image Sensor		1/3" progressive scan CMOS
Picture Elements		2688 (H) x 1520 (V)
Minimum Illumination	Color	0.005 Lux (F1.6, AGC ON)
	Black/White	0.001 Lux (F1.6, AGC ON)
	IR On	0 Lux
Shutter Speed		Automatic, Manual 1/3 ~ 1/100000 sec)
White Balance		Automatic, Manual
Gain Control		Automatic, Manual
S/N Ratio		50 dB
WDR Pro		Yes
Dynamic Range		120 dB
Lens		
Megapixel		4 MP
Day/Night		Yes (with removable IR-cut filter)
Focal Length		2.8 mm
Lens Type		Fixed
Maximum Aperture		F/1.6
Mount		M12
FOV	Horizontal	101°
	Vertical	57°
	Diagonal	100.7°
Operation	Focus	Fixed
	Zoom	Fixed
	Iris	Fixed
IR LED Quantity		2 IR LEDs, 850nm
Max. IR Distance		20 m (65 ft)

DORI		Detect	Observe	Recognize	Identify
Lens	2.8 mm	60.6 m (198.8 ft)	24.2 m (79.3 ft)	12.1 m (39.6 ft)	6.0 m (19.6 ft)
Operation					
Video Compression		H.265, H.265+, H.264, H.264+, MJPEG			
Video Streaming		Triple streams			
Video Resolution	Main Stream	2688 x 1520 (Default), 2592 x 1520, 2560 x 1440, 2304 x 1296, 1920 x 1080			
	Sub Stream	1280 x 720 (Default), 704 x 576, 704 x 480, 640 x 480, 640 x 360, 480 x 240, 352 x 240			
	Third Stream	1280 x 720 (Default), 704 x 576, 704 x 480, 480 x 240, 352 x 240			
Frame Rate		30 fps at 2688 x 1520 / 2592 x 1520 / 2560 x 1440 / 2304 x 1296 / 1920 x 1080 / 1280 x 720 / 704 x 480 / 640 x 480 / 640 x 360 / 480 x 240 / 352 x 240 (60 Hz)			
		25 fps at 2688 x 1520 / 2592 x 1520 / 2560 x 1440 / 2304 x 1296 / 1920 x 1080 / 1280 x 720 / 704 x 576 / 640 x 480 / 640 x 360 / 480 x 240 / 352 x 288 (50 Hz)			
		* The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).			
Storage Recording		Recording Failover, Edge			
Maximum Throughput		64 Mbps			
Maximum Streams		8 *By default, 2 connections are occupied whether connected to GV-Cloud VMS or not. *When the total bitrate is within the maximum throughput			
Video Analytics		Motion Detection, Video Exception Detection (Abnormal Color Detection, Scene Change, Video Blur), Object Abandoned/Missing Detection, Tampering alarm			
Smart Alarm		Audio Exception, Cable Disconnection, IP Address Conflict, SD Card Error, SD Card Full			
Image Setting		Brightness, Contrast, Saturation, Sharpness, Flicker-less, 3D Noise Reduction, Image Orientation (Flip, Mirror, 0°, 90°, 180°, 270°-including Corridor format).			
Dual Redundant Images		Yes (for failsafe firmware upgrade)			
Audio Compression		G.711			
Audio Support		Two-way audio (external speaker required)			
Digital I/O	Input	1 Input, dry contact, NO / NC			
	Output	1 Relay Output (1A 30V DC / 0.3A 125V AC)			
Deep Learning Function					
AI Analytics		Face Event: Face Detection Smart Event: - Line Crossing, Region Entrance, Region Exiting, Region Intrusion, Target Counting, Heat Map, Video Metadata: Human & Vehicle classification - Loitering Detection, Illegal Parking Detection *Face events and smart events cannot be enabled at the same time. *A maximum of 2 smart detection functions are suggested at a time to ensure comprehensive detection results and the optimized performance by the camera. *Once connected to GV-Cloud VMS / GV-Center V2, up to 2 smart detection functions are supported.			
Video Metadata	People	Gender, Age, Top / Bottom (Type, Color), Accessories (Hat, Bag, Face Mask, Glasses)			
	Vehicle	Type, Color, Brand, Model			
	Non-Motor Vehicle	Type			
Network					
Interface		10/100 Ethernet			
Protoco/Cybersecurity		802.1x, DDNS, DHCP, FTP, HTTP POST, HTTP (digest), HTTPs, IPv4, IPv6, NTP, ONVIF (Profile G, S, T, M), PPPoE, QoS, RTCP, RTMP, RTP, RTSP, SMTP, SNMP, UDP, UPnP, MQTT, IP Filtering, Password Brute force protection, System Log preserved			
Mechanical					
Camera Angle Adjustment	Pan	0 ~ 360°			
	Tilt	0 ~ 75°			
	Rotate	0 ~ 350°			
Connectors	Power	DC Jack (DC 12 V, 1 A) / PoE (IEEE 802.3af)			
	Ethernet	Shielded RJ-45 connector			
	Audio	Built-in microphone		Yes	
		External microphone required		Yes (audio jack, 3.5 mm or 0.14 in)	
		Built-in speaker		No	
External speaker required		Yes (audio jack, 3.5 mm or 0.14 in)			

		* Choose either the built-in or external option for devices with a microphone or speaker. * The Audio In port only supports microphones with a power supply.
	Digital I/O	4-pin terminal block pitch 3.5 mm (0.14")
	Local Storage	microSD card slot (SD / SDHC / SDXC), up to 512 GB AES 128
General		
Operating Temperature	-30 ~ 60°C (-22 ~ 140°F)	
Humidity	0 ~ 95% (no condensation)	
Power Source	DC 12 V / PoE (IEEE 802.3af)	
Max. Power Consumption	5.5 W	
Dimensions	Ø 110.4 x 62 mm (Ø 4.3 x 2.4 in)	
Weight	0.42 kg (0.93 lb)	
Warranty	5 years	
Vandal Resistance	IK10	
Certification	CE, FCC, RoHS, UKCA, UL compliant	
Web Interface		
Installation Management	Web-based configuration	
Maintenance	Encrypted File System (Data at Rest), Firmware upgrade through Web Browser or Utility	
Access from Web Browser	Live View, Playback, Video Recording, Image Quality, Bandwidth Control, Image Snapshot, Two-way Audio Capable, Digital Zoom, Text Overlay, Image Masking, Intelligent Mark	
Language	Chinese Traditional, Czech, Dutch, English, French, German, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Romanian, Russian, Spanish, Spanish (Latin America), Turkish	
Software Applications		
Software Supported	GV-VMS (V17.4.8 / V18.3.3 / V20.0.0 or later), GV-Edge Recording Manager (V2.2.8 or later), GV-Control Center (V4.2.0 or later), GV-Recording Server (V2.1.1 or later), GV-Center V2 (V18.4.1 or later), GV-Cloud VMS (V1.3.0 or later), GV-IP Device Utility (V8.9.9 or later)	
Smart Device Access	GV-Eye for iOS and Android (V3.2.0 or later)	
Live Viewing	Web Browser (Edge, IE mode in Edge, Chrome, Firefox, Safari), Mobile App	
Security		
Advanced Security Features	- Signed Firmware & Secure Firmware Upgrade - Secure Boot (software-based) - Multi-User Access Management with Role-Based Permissions - Mandatory Password Change at First Login - Digest Authentication - Account Lockout & Automatic IP Blocking after Failed Login Attempts - IP Address Filtering (Whitelist / Blacklist) - Tamper-Resistant System Logs (Preserved After Reset) - HTTPS / TLS Encrypted Communications - Firmware SBOM (Software Bill of Materials) available	

Accessories


Model No.	Name		Details
GV-Mount211-4	Wall Mount Bracket		Dimensions: 129.5 x 155 x 74.5 mm (5.10 x 6.10 x 2.93 in) Weight: 0.53 kg (1.16 lb)
GV-Mount211-9 (must be used with Mount509)	Wall Mount Bracket		Dimensions: Ø 121 x 148 mm (Ø 4.76 x 5.83 in) Weight: 0.35 kg (0.77 lb)

GV-Mount314 (must be used with Mount211-9)	Corner Mount Bracket		Dimensions: 215 x 121.4 x 215 mm (8.46 x 4.78 x 8.46 in) Weight: 2.05 kg (4.52 lb)
GV-Mount470 (must be used with Mount211-9)	Pole Mount Bracket		Dimensions: 163.3 x 54.5 x 215 mm (6.43 x 2.15 x 8.46 in) Weight: 1.10 kg (2.43 lb)
GV-Mount509	Junction Box		Dimensions: Ø 112 x 40 mm (Ø 4.41 x 1.57 in) Weight: 0.23 kg (0.51 lb)
GV-Mount927 (for standard US single and double gang boxes only)	Power Box Mount Bracket		Dimensions: Ø 145 x 11.2 mm (Ø 5.71 x 0.44 in) Weight: 0.2 kg (0.44 lb)
GV-PA191	PoE Adapter		GV-PA191 is a Power over Ethernet (PoE) adapter designed to provide power to the IP device through a single Ethernet cable.
GV-PA301	Gigabit PoE Adapter		GV-PA301 is a Gigabit Power over Ethernet (PoE) adapter.
GV-POE Switch	GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.		
Power Adapter	Contact our sales representatives for the countries and areas supported.		

Mounting Type

Wall Bracket Mount GV-Mount211-4	Junction Box Mount GV-Mount509	Junction Box Mount GV-Mount509	Wall Bracket Mount GV-Mount211-9
			

Junction Box Mount	Wall Bracket Mount	Pole Bracket Mount
GV-Mount509	GV-Mount211-9	GV-Mount470

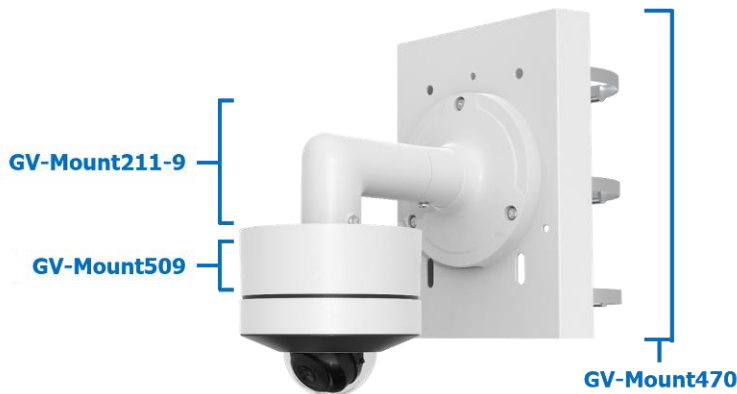

Junction Box Mount	Wall Bracket Mount	Corner Bracket Mount
GV-Mount509	GV-Mount211-9	GV-Mount314



Note:

1. To use GV-Cloud VMS, avoid connecting to other GV-Software at the same time.
2. To use GV-Cloud VMS, a microSD card must be installed. Industrial-grade microSD cards are recommended to avoid event recordings writing failure.
3. Upon the initial connection of GV-Cloud IP Cameras to GV-Cloud VMS, the Standard Plan will be provided for free for 180 days.
4. GV-Center V2 Standard / Pro can only receive motion events from GV-Cloud IP Cameras. To receive AI and PVD events, GV-Center V2 AI is required.
5. All specifications are subject to change without notice.

Packing List

- | | |
|--------------------------|--------------------------|
| 1. GV-GDR4900 Mini Dome | 4. Drill Template Paster |
| 2. Waterproof Rubber Set | 5. Hex Key |
| 3. Screw Kit | 6. Download Guide |