

GV-GDRF4800 AI 4MP H.265 Super Low Lux WDR Pro Full Color White LED IR

Mini Fixed Rugged IP Dome



- AI deep learning: AI Perimeter Protection & Classification (Human, Vehicle)
- 1/3" progressive scan CMOS sensor
- Min. illumination at 0.005 lux
- Triple streams from H.265, H.264 or MJPEG
- Up to 30 fps at 2560 x 1440
- Wide Dynamic Range Pro (WDR Pro)
- Smart white LED distance up to 30 m (100 ft)
- Intelligent IR
- IR distance up to 30 m (100 ft)
- Ingress protection (IP67)
- Vandal resistance (IK10 for metal casing)
- 3-axis mechanism (pan / tilt / rotate)
- Built-in microphone
- Built-in microSD card slot (SD / SDHC / SDXC) for local storage
- DC 12V / PoE (IEEE 802.3af)
- AI analytics (Line Crossing, Region Intrusion)
- Smart lighting switch between IR LED (for motion detection) and White LED (for people, vehicle and motorcycle detection)
- 3D noise reduction
- Motion detection
- Text overlay
- Privacy mask
- 21 languages supported
- ONVIF (Profile G, S, T, M) conformant

Introduction

GV-GDRF4800 is a 4 MP outdoor mini fixed rugged IP dome camera, equipped with smart white LEDs for full color surveillance during nighttime. The camera supports H.265 video codec to achieve a better compression ratio while maintaining high-quality pictures at reduced network bandwidth. GV-GDRF4800 adheres to IP67 and IK10 standards and can be powered through PoE.


Empowered by deep learning algorithms, AI technology distinguishes humans and vehicles from other moving objects. Integrated with GeoVision Video Management Software (GV-VMS), it supports AI perimeter protection, real-time alert, playback, and more.

Models

Model	Iris	Focal Length (mm)	Horizontal FOV	Maximum Aperture	Image Format
GV-GDRF4800-2F	Fixed	2.8 mm	94°	F/1.6	1/3"
GV-GDRF4800-3F		3.6 mm	78°		

Deep Learning Function

AI Perimeter Protection (Line Crossing, Region Intrusion)

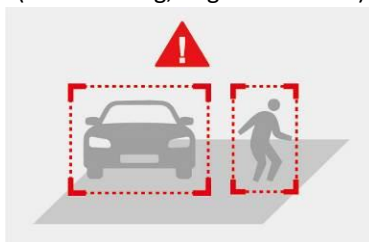

Specifications

Camera					
Image Sensor		1/3" progressive scan CMOS			
Picture Elements		2560 (H) x 1440 (V)			
Minimum Illumination	Color	0.005 Lux (F1.6, AGC ON)			
	IR On	0 Lux			
Shutter Speed		Auto / Manual (1 ~ 1/100000 sec)			
White Balance		Auto / Manual			
Gain Control		Auto / Manual			
S/N Ratio		50 dB			
WDR Pro		Yes			
Dynamic Range		120 dB			
Lens		GV-GDRF4800-2F		GV-GDRF4800-3F	
Megapixel		4 MP			
Day / Night		Yes (with removable IR-cut filter)			
Lens Type		Fixed			
Focal Length		2.8 mm		3.6 mm	
Maximum Aperture		F/1.6			
Mount		M12			
Image Format		1/3"			
FOV	Horizontal	94°		78°	
	Vertical	50°		40°	
	Diagonal	115°		97°	
Operation	Focus	Fixed			
	Zoom	Fixed			
	Iris	Fixed			
IR LED	Quantity	2 IR LEDs			
	Max. IR Distance	30 m (100 ft)			
Smart Illumination	Quantity	2 White LEDs			
	Max. White LED Light Distance	30 m (100 ft)			
DORI		Detect	Observe	Recognize	Identify
Lens	2.8 mm	62 m (203.4 ft)	25 m (82.0 ft)	12 m (39.3 ft)	6 m (19.6 ft)
	3.6 mm	79 m (259.1 ft)	32 m (104.9 ft)	16 m (52.4 ft)	8 m (26.2 ft)
Operation					
Video Compression		H.265, H.265+, H.264, H.264+, MJPEG			
Video Streaming		Triple streams			
Video Resolution	Main Stream	2560 x 1440 (default), 2304 x 1296, 1920 x 1080, 1280 x 720			
	Sub Stream	1280 x 720 (default), 704 x 480, 704 x 576, 640 x 480, 352 x 240, 352 x 288			
	Third Stream	704 x 480 (default), 704 x 576, 480 x 240, 352 x 240, 352 x 288			
Frame Rate		Max. 30 fps (60 Hz) at 2560 x 1440, 2304 x 1296, 1920 x 1080, 1280 x 720, 704 x 480, 640 x 480, 480 x 240, 352 x 240			
		Max. 25 fps (50 Hz) at 2560 x 1440, 2304 x 1296, 1920 x 1080, 1280 x 720, 704 x 576, 640 x 480, 480 x 240, 352 x 288			
		* The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).			

Maximum Throughput		36 Mbps	
Maximum Streams * When the total bitrate is within the maximum throughput		6	
Video Analytics		Motion Detection, Object Abandoned / Missing Detection, Video Exception	
Smart Alarm		Motion Detection, SD Card Error, SD Card Full, IP Address Conflict, Cable Disconnection, Scene Change Detection, Video Blur Detection, Abnormal Color Detection	
Image Setting		Brightness, Contrast, Hue, Saturation, Sharpness, 3D Noise Reduction, BLC, Antiflicker, White Balance, Shutter, Gain, Image Orientation (Flip, Mirror, 0°, 90°, 180°, 270° – including Corridor format)	
Audio Compression		G.711	
Audio Support		One-way audio	
Deep Learning Function			
AI Analytics		Line Crossing, Region Intrusion (Human & Vehicle classification) * The two functions can only be enabled one at a time.	
Network			
Interface		10/100 Ethernet	
Protocol		802.1x, DDNS, DHCP, FTP, HTTP POST, HTTP, HTTPS, IPv4, IPv6, NTP, ONVIF (Profile G, S, T, M), PPPoE, QoS, RTCP, RTMP, RTP, RTSP, SMTP, SNMP, UDP, UPnP	
Mechanical			
Camera Angle Adjustment	Pan	0 ~ 355°	
	Tilt	0 ~ 70°	
	Rotate	0 ~ 180°	
Connectors	Power	DC jack	
	Ethernet	RJ-45 connector	
	Audio	Built-in microphone	Yes
		External microphone required	Yes (audio jack, 3.5 mm or 0.14 in)
		Built-in speaker	No
		External speaker required	No
		* Choose either the built-in or external microphone.	
		* The Audio In port only supports microphones with a power supply.	
	Local Storage	microSD card slot (SD / SDHC / SDXC), up to 256 GB	
General			
Operating Temperature		-30°C ~ 60°C (-22°F ~ 140°F)	
Humidity		0 ~ 95% (no condensation)	
Power Source		DC 12V, 1A / PoE (IEEE 802.3af)	
Max. Power Consumption		5.5 W	
Dimensions		Ø 119 × 87.8 mm (Ø 4.7 × 3.5 in)	
Weight		0.64 kg (1.41 lb)	
Ingress Protection		IP67	
Vandal Resistance		IK10 for metal casing	
Certification		CE, FCC, RoHS, UKCA compliant	
Web Interface			
Installation Management		Web-based configuration	
Maintenance		Firmware upgrade through Web Browser or Utility	
Access from Web Browser		Live View, Playback, Video Recording, Image Quality, Bandwidth Control, Image Snapshot, Digital Zoom, Text Overlay, Image Masking, Intelligent Mark	
Language		Chinese Traditional, Czech, Dutch, English, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Romanian, Russian, Spanish, Spanish (Latin America), Turkish, Ukrainian	
Software Applications			
Software Supported		GV-VMS (V17.4.8 / V18.3.5 or later, patch files required / V20.0.0 or later), GV-Control Center (V4.2.1 or later, patch files required), GV-Edge Recording Manager (V2.3.0 or later), GV-Recording Server (V2.1.1 or later, patch files required), GV-IP Device Utility (V9.0.4 or later)	
Smart Device Access		GV-Eye for iOS and Android (V3.4.1 or later)	
Live Viewing		Web Browser (Chrome, Edge, Firefox, Safari), Mobile App	

Note:

1. To avoid affecting IR or white LED performance, follow the cleaning guidelines below.
 - Do not touch or wipe the dome cover surface directly during installation or use, as acidic sweat may corrode the coating and degrade image quality.
 - Remove dust with an oil-free soft brush or a hair dryer. For smudges, gently wipe from the center outward with an oil-free cotton cloth or detergent-soaked paper. Always use a dry, soft cloth when wiping, and replace the cloth and repeat if needed.
 - Avoid using hard materials or alkaline cleaners, as they may damage the surface.
2. All specifications are subject to change without notice.

Packing List

1. GV-GDRF4800 Mini Dome
2. Waterproof Rubber Set
3. Screw Kit
4. Drill Template Paster
5. Download Guide

Accessories

Model No.	Name		Details
GV-Mount211-4	Wall Mount Bracket		Dimensions: 129.5 x 155 x 74.5 mm (5.10 x 6.10 x 2.93 in) Weight: 0.53 kg (1.16 lb)
GV-Mount211-8 (must be used with GV-Mount517)	Wall Mount Bracket		Dimensions: 188.4 x 121 x 137.3 mm (7.41 x 4.76 x 5.4 in) Weight: 0.52 kg (1.15 lb)
GV-Mount314 (must be used with GV-Mount211-8 + GV-Mount517)	Corner Mount Bracket		Dimensions: 215 x 121.4 x 215 mm (8.46 x 4.78 x 8.46 in) Weight: 2.05 kg (4.52 lb)
GV-Mount470 (must be used with GV-Mount211-8 + GV-Mount517)	Pole Mount Bracket		Dimensions: 163.3 x 54.5 x 215 mm (6.43 x 2.15 x 8.46 in) Weight: 1.10 kg (2.43 lb)
GV-Mount517	Junction Box		Dimensions: 117.9 x 143.3 x 39 mm (4.64 x 5.64 x 1.54 in) Weight: 0.24 kg (0.53 lb)
GV-Mount927 (for standard US single and double gang boxes only)	Power Box Mount Bracket		Dimensions: Ø 145 x 11.2 mm (Ø 5.71 x 0.44 in) Weight: 0.2 kg (0.44 lb)
GV-PA191	PoE Adapter		GV-PA191 is a Power over Ethernet (PoE) adapter designed to provide power to the IP device through a single Ethernet cable.

GV-PA301

Gigabit PoE Adapter



GV-PA301 is a Gigabit Power over Ethernet (PoE) adapter.



GV-POE Switch

GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.

Power Adapter

Contact our sales representatives for the countries and areas supported.

Dimensions

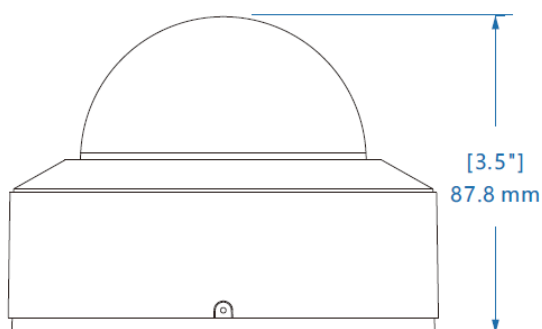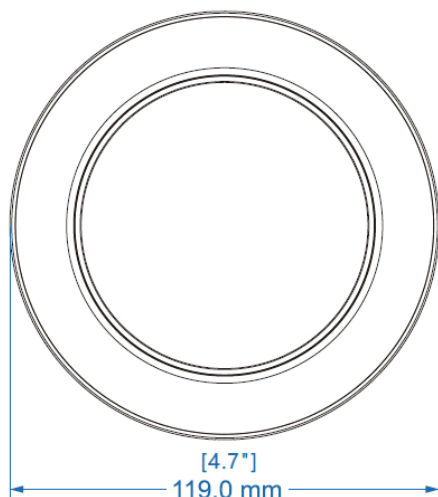

Mounting Type

Wall Bracket Mount	Junction Box Mount	Junction Box Mount	Wall Bracket Mount
GV-Mount211-4	GV-Mount517	GV-Mount517	GV-Mount211-8

Junction Box Mount	Wall Bracket Mount	Corner Bracket Mount
GV-Mount517	GV-Mount211-8	GV-Mount314

Junction Box Mount	Wall Bracket Mount	Pole Bracket Mount
GV-Mount517	GV-Mount211-8	GV-Mount470

The diagram illustrates the assembly of three mounting brackets for a camera. The GV-Mount211-8 is the main wall bracket. The GV-Mount517 is a junction box mount that connects to the bottom of the GV-Mount211-8. The GV-Mount470 is a pole bracket that connects to the side of the GV-Mount211-8. A camera is shown attached to the bottom of the GV-Mount211-8.