

GV-GEBF2802

AI 2MP H.265 Super Low Lux WDR Pro Full Color Warm LED IR

Eyeball Dome IP Camera



- AI deep learning: AI Perimeter Protection & Classification (Human, Vehicle)
- 1/2.8" progressive scan CMOS sensor
- Min. illumination at 0.008 lux
- Triple streams from H.265, H.264 or MJPEG
- Up to 30 fps at 1920 x 1080
- Smart warm LED distance up to 30 m (100 ft)
- Intelligent IR
- Wide Dynamic Range Pro (WDR Pro)
- IR distance up to 30 m (100 ft)
- Built-in microphone
- Built-in microSD card slot (SD / SDHC / SDXC) for local storage
- 3-axis mechanism (pan / tilt / rotate)
- Ingress protection (IP67)
- Vandal resistance (IK10 for metal casing)
- DC 12V / PoE (IEEE 802.3af)
- 3D noise reduction
- AI analytics (Line Crossing, Region Intrusion)
- Smart lighting switch between IR LED (for motion detection) and Warm LED (for people, vehicle, and motorcycle detection)
- Motion detection
- Text overlay
- Privacy mask
- 20 languages supported
- ONVIF (Profile G, S, T, M) conformant

Introduction


GV-GEBF2802 is a 2 MP eyeball dome IP camera, equipped with smart warm LED for full color surveillance during nighttime. The camera supports H.265 video codec to achieve a better compression ratio while maintaining high-quality pictures at reduced network bandwidth. GV-GEBF2802 adheres to IP67 and IK10 standards and can be powered through PoE.

Empowered by deep learning algorithms, AI technology distinguishes humans and vehicles from other moving objects. Integrated with GeoVision Video Management Software (GV-VMS), it supports AI perimeter protection, real-time alert, playback, and more.

Models

Model	Iris	Focal Length (mm)	Horizontal FOV	Maximum Aperture	Image Format
GV-GEBF2802-2F	Fixed	2.8 mm	107°	F/1.6	1/2.8"
GV-GEBF2802-3F		3.6 mm	89°		

Deep Learning Function

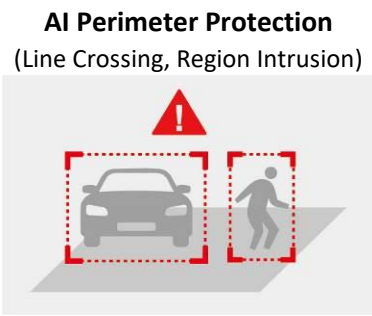

Specifications

Camera					
Image Sensor		1/2.8" progressive scan CMOS			
Picture Elements		1920 (H) x 1080 (V)			
Minimum Illumination	Color	0.008 Lux (F1.6, AGC ON)			
	IR On	0 Lux			
Shutter Speed		Auto / Manual (1/3 ~ 1/100000 sec)			
White Balance		Auto / Manual			
Gain Control		Auto / Manual			
S/N Ratio		50 dB			
WDR Pro		Yes			
Dynamic Range		120 dB			
Lens		GV-GEBF2802-2F		GV-GEBF2802-3F	
Megapixel		2 MP			
Day / Night		Yes (with removable IR-cut filter)			
Lens Type		Fixed			
Focal Length		2.8 mm		3.6 mm	
Maximum Aperture		F/1.6			
Mount		M12			
FOV	Horizontal	107°		89°	
	Vertical	56°		47.5°	
	Diagonal	126°		104°	
Operation	Focus	Fixed			
	Zoom	Fixed			
	Iris	Fixed			
IR LED	Quantity	1 IR LED			
	Max. IR Distance	30 m (100 ft)			
Smart Illumination	LED Quantity	1 Warm LED			
	Max. LED Distance	30 m (100 ft)			
DORI		Detect	Observe	Recognize	Identify
Lens	2.8 mm	41 m (134.5 ft)	16 m (52.4 ft)	8 m (26.2 ft)	4 m (13.1 ft)
	3.6 mm	50 m (164.0 ft)	20 m (65.6 ft)	10 m (32.8 ft)	5 m (16.4 ft)
Operation					
Video Compression		H.265, H.265+, H.264, H.264+, MJPEG			
Video Streaming		Triple streams from H.265, H.264, or MJPEG			
Video Resolution	Main Stream	1920 x 1080 (Default), 1280 x 720			
	Sub Stream	704 x 480, 704 x 576, 640 x 480, 640 x 360 (Default), 352 x 240, 352 x 288			
	Third Stream	704 x 480 (Default), 704 x 576, 480 x 240, 352 x 240, 352 x 288			
Frame Rate		Max. 30 fps (60 Hz) at 1920 x 1080 / 1280 x 720 / 704 x 480 / 640 x 480 / 352 x 240			
		Max. 25 fps (50 Hz) at 1920 x 1080 / 1280 x 720 / 704 x 576 / 640 x 480 / 352 x 288			
		* The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).			

Maximum Throughput		36 Mbps		
Maximum Streams * When the total bitrate is within the maximum throughput		6		
Video Analytics		Motion Detection, Video Exception Detection (Abnormal Color Detection, Scene Change, Video Blur), Object Abandoned/Missing Detection		
Smart Alarm		Cable Disconnection, IP Address Conflict, SD Card Error, SD Card Full		
Image Setting		Brightness, Contrast, Hue, Saturation, Sharpness, 3D Noise Reduction, BLC, Antiflicker, White Balance, Shutter, Gain, Image Orientation (Flip, Mirror, 0°, 90°, 180°, 270° – including Corridor format)		
Audio Compression		G.711		
Audio Support		One-way audio		
Deep Learning Function				
AI Analytics		Line Crossing, Region Intrusion *The two functions can only be enabled one at a time.		
Network				
Interface		10/100 Ethernet		
Protocol		802.1X authentication (EAP-TLS, EAP-MD5), DDNS, DHCP, FTP, HTTP POST, HTTP, HTTPS, IPv4, IPv6, NTP, ONVIF (Profile G, S, T, M), PPPoE, QoS, RTCP, RTMP, RTP, RTSP, SMTP, SNMP, UDP, UPnP		
Mechanical				
Camera Angle Adjustment	Pan	0 ~ 360°		
	Tilt	0 ~ 75°		
	Rotate	0 ~ 360°		
Connectors	Power	DC jack		
	Ethernet	RJ-45 connector		
		Audio	Built-in microphone	Yes
			External microphone required	Yes (audio jack, 3.5 mm or 0.14 in)
			Built-in speaker	No
			External speaker required	No
			* Choose either the built-in or external microphone.	
	* The Audio In port only supports microphones with a power supply.			
	Local Storage	microSD card slot (SD / SDHC / SDXC), up to 256 GB		
General				
Operating Temperature		-30°C ~ 60°C (-22°F ~ 140°F)		
Humidity		0 ~ 95% (no condensation)		
Power Source		DC 12V, 1A / PoE (IEEE 802.3af)		
Max. Power Consumption		6 W		
Dimensions		Ø 94.6 x 82.8 mm (Ø 3.7 x 3.3 in)		
Weight		0.45 kg (0.99 lb)		
Ingress Protection		IP67		
Vandal Resistance		IK10 for metal casing		
Certification		CE, FCC, LVD, RoHS, UKCA compliant		
Web Interface				
Installation Management		Web-based configuration		
Maintenance		Firmware upgrade through Web Browser or Utility		
Access from Web Browser		Live View, Playback, Video Recording, Image Quality, Bandwidth Control, Image Snapshot, Digital Zoom, Text Overlay, Image Masking, Intelligent Mark		
Language		Chinese Traditional, Czech, Dutch, English, French, German, Greek, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Romanian, Russian, Spanish, Spanish (Latin America), Turkish, Ukrainian		
Software Applications				
Software Supported		GV-VMS (V17.4.8 / V18.3.5 or later, patch files required / V20.0.1 or later), GV-Edge Recording Manager (V2.3.1 or later), GV-Control Center (V4.2.1 or later, patch files required), GV-Recording Server (V2.1.1 or later, patch files required), GV-IP Device Utility (V9.0.5 or later)		
Smart Device Access		GV-Eye for iOS and Android (V3.5.0 or later)		
Live Viewing		Web Browser (Edge, IE mode in Edge, Chrome, Firefox, Safari), Mobile App		

Note: All specifications are subject to change without notice.


Packing List

- | | |
|-----------------------------|--------------------------|
| 1. GV-GEBF2802 Eyeball Dome | 4. Drill Template Paster |
| 2. Waterproof Rubber Set | 5. Download Guide |
| 3. Screw Kit | |


Accessories

Model No.	Name		Details
GV-Mount211-4	Wall Mount Bracket		Dimensions: 129.5 x 155 x 74.5 mm (5.10 x 6.10 x 2.93 in) Weight: 0.53 kg (1.16 lb)
GV-Mount211-8 (must be used with GV-Mount506-1)	Wall Mount Bracket		Dimensions: 188.4 x 121 x 137.3 mm (7.41 x 4.76 x 5.4 in) Weight: 0.52 kg (1.15 lb)
GV-Mount314 (must be used with GV-Mount211-8 + GV-Mount506-1, or GV-Mount506-1)	Corner Mount Bracket		Dimensions: 215 x 121.4 x 215 mm (8.46 x 4.78 x 8.46 in) Weight: 2.05 kg (4.52 lb)
GV-Mount470 (must be used with GV-Mount211-8 + GV-Mount506-1, or GV-Mount506-1)	Pole Mount Bracket		Dimensions: 163.3 x 54.5 x 215 mm (6.43 x 2.15 x 8.46 in) Weight: 1.10 kg (2.43 lb)
GV-Mount506-1	Junction Box		Dimensions: 117.9 x 143.3 x 47 mm (4.64 x 5.64 x 1.85 in) Weight: 0.38 kg (0.84 lb)
GV-Mount507	Junction Box		Dimensions: Ø 96 x 38.8 mm (Ø 3.78 x 1.53 in) Weight: 0.135 kg (0.30 lb)
GV-Mount927 (for standard US single and double gang boxes only)	Power Box Mount Bracket		Dimensions: Ø 145 x 11.2 mm (Ø 5.71 x 0.44 in) Weight: 0.2 kg (0.44 lb)
GV-PA191	PoE Adapter		GV-PA191 is a Power over Ethernet (PoE) adapter designed to provide power to the IP device through a single Ethernet cable.
GV-PA301	Gigabit PoE Adapter		GV-PA301 is a Gigabit Power over Ethernet (PoE) adapter.
GV-POE Switch		GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.	
Power Adapter		Contact our sales representatives for the countries and areas supported.	

Dimensions

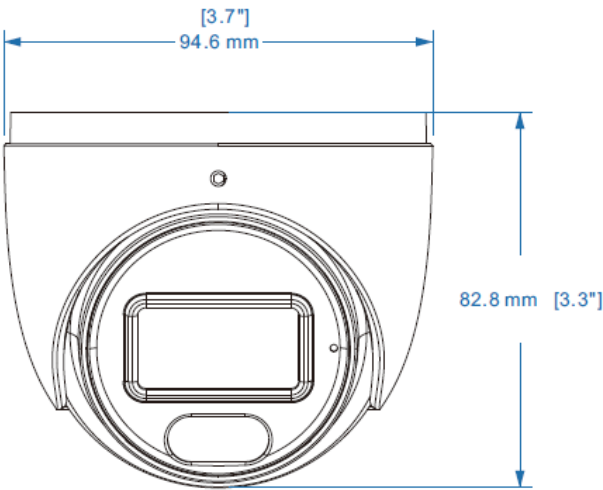

Mounting Type

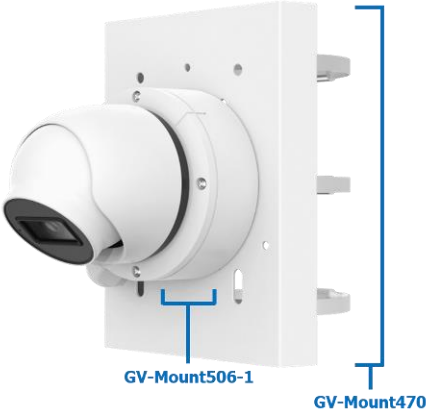Wall Bracket Mount	Junction Box Mount	Junction Box Mount	Pole Bracket Mount
GV-Mount211-4	GV-Mount506-1	GV-Mount506-1	GV-Mount470
			

Junction Box Mount	Junction Box Mount	Wall Bracket Mount
GV-Mount507	GV-Mount506-1	GV-Mount211-8
		

