

GV-POE0801 8-Port 802.3af/at Web Management PoE Switch




- 8-port 10/100BaseTX, PSE plus 2-port Gigabit uplink (1*TP, 1*SFP)
- IEEE 802.3af/at compliant
- Web-based configuration and management
- VLAN, QoS, RSTP, IGMP Snooping, LACP, Port Security, Bandwidth Control, Broadcast Storm Control
- Max. 119 W PoE Budget
- 11" metal case
- Up to 8 GV-IP cameras support

Introduction

GV-POE0801 is an 8-port 10/100BaseTX, PSE plus 2-port Gigabit Uplink (1xTP, 1xSFP) Desktop Web Smart PoE Switch. The switch supports IEEE 802.3af/at Power over Ethernet standard, with up to 30 W per port and a maximum PoE budget of 119 W. It eliminates the need for power cables to connect your powered devices (PD), such as IP cameras. The switch also provides exceptionally smart Web management features, such as VLAN, QoS, RSTP, IGMP Snooping, LACP, Port Security, and more.

The switch is perfect for small or medium network environments to strengthen network connection and efficiency. It also gives you the option of installing it in a 19" cabinet with a rack mount kit or underneath a desk.

Dimensions

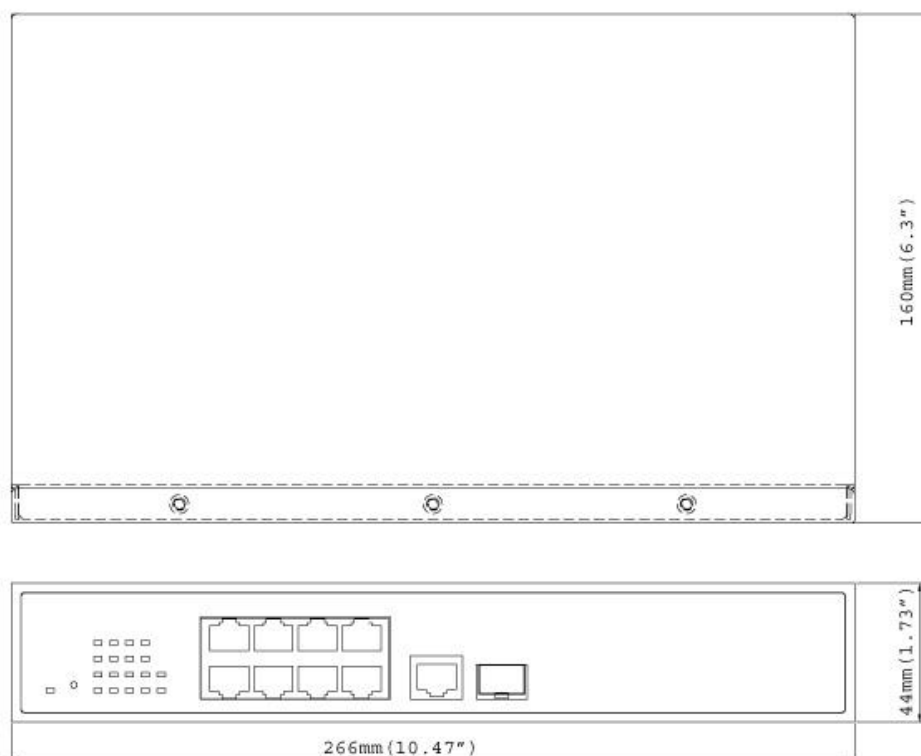

Specifications

Ethernet	
Layer Supported	L2
Ports	
Number of Ports	10 ports 8-port Fast Ethernet 10/100BaseTX, IEEE 802.3at PSE 2-port Gigabit uplink (1 x TP, 1 x SFP)
Performance	
MAC Address	4 K
Buffer Memory	2.75 M bits
Transmission Method	Store and Forward
Transmission Media	10BaseT Cat. 5 UTP/STP 100BaseTX Cat. 5 UTP/STP 1000BaseT Cat. 5e, 6 UTP/STP
Filtering/Forwarding Rates	10 Mbps port - 14,880 pps 100 Mbps port - 148,800 pps 1000 Mbps port - 1,488,000 pps
Backplane Capacity	5.6 Gbps
Smart Features	
Port Based VLAN	10
Tagged Based VLAN	32, VID = 1 ~ 4094
IGMP Snooping	V1 & V2
Link Aggregation	1, Gigabit ports
Quality of Service (QoS)	High & Low priority queues, 802.1p
Security	Port & MAC binding, 3 MAC per port
Port Management	Port State, Speed/Duplex, Flow Control Configuration, Port Mirroring, Bandwidth Control, Broadcast Storm Control, PoE
Administrator Management	Web Management, Password Protection, Configuration Backup/Restore, Firmware Upgrade
Power over Ethernet	
PoE Standard	IEEE 802.3af/at compliant
PoE Max Power per Port	30 W
PoE Power Budget	119 W
PoE Mode	Mode B
Mechanical	
LED Indicators	Per Port: Link/Act PoE Act/Status Power
General	
Dimensions (H x W x D)	44 x 266 x 160 mm (1.73" x 10.47" x 6.3")
Weight	1.8 kg (3.97 lb)
Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature	-20°C ~ 90°C (-4°F ~ 194°F)
Humidity	10 to 90% RH (non-condensing)
Power Requirements	
Power Input	100 ~ 240 V/AC, 50 ~ 60 Hz
Max Power Consumption	130 W
Standards and Regulatory	
Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.ab 1000BaseT IEEE 802.3z 1000BaseSX/LX IEEE 802.3x Flow Control

	IEEE 802.3ad Link Aggregation Control Protocol IEEE 802.1Q VLAN IEEE 802.1p Class of Service IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.3at Power Over Ethernet (PoE+)
Certification	CE, FCC Class A, RoHS compliant

Note:
1. The switch is a plug-and-play device and compatible with all SFP modules.
2. Specifications are subject to change without notice.

Accessories

Name	Details
GV-LC	 The SFP transceiver complies with IEEE 802.3z 1000BaseSX Ethernet, and provides the media transmission distance up to 220 / 550 m.
GV-LC10	 The SFP transceiver complies with IEEE 802.3z 1000BaseLX Ethernet, and provides the media transmission distance up to 10 km.
GV-LC V2	 The SFP transceiver complies with IEEE 802.3z 1000BaseSX Ethernet, and provides the media transmission distance up to 550 m.
GV-LC10 V2	 The SFP transceiver complies with IEEE 802.3z 1000BaseLX Ethernet, and provides the media transmission distance up to 20 km.

Packing List

- 1. GV-POE0801
- 2. Screw x 8
- 3. Rack Mount Kit
- 4. AC Power Cord
- 5. Software CD
- 6. GV-POE0801 Quick Start Guide